



APPROACH PLAN

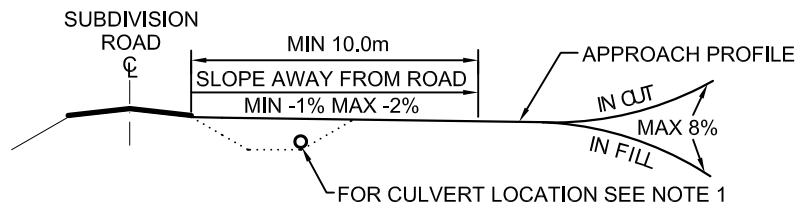

DITCH AND CULVERT LOCATION

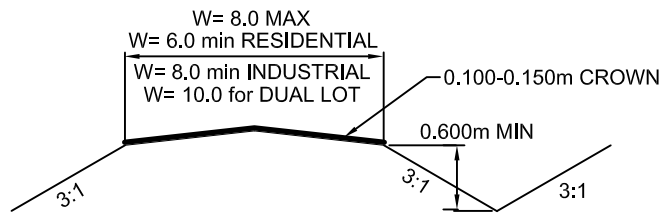

APPROACH CROSS SECTION

NOTES

1. WHEN CULVERTS ARE REQUIRED THEY MUST BE C.S.P. CULVERTS AND BE THE FOLLOWING MINIMUM DIAMETERS  
 RESIDENTIAL - 0.400m  
 INDUSTRIAL - 0.500m  
 - LENGTH WILL VARY WITH DEPTH OF FILL  
 - CULVERT TO BE PLACED AT TOE OF BACKSLOPE
2. ALL DIMENSIONS SHOWN ARE IN METERS
3. MINIMUM APPROACH LENGTH - FROM EDGE OF ROAD SHOULDER TO R/W BOUNDARY



RESIDENTIAL AND INDUSTRIAL APPROACHES

DATE DRAWN	SEPT 2008
DATE REVISED	DEC 2013
DRAWING NUMBER	

7.12