


APPROACH PLAN

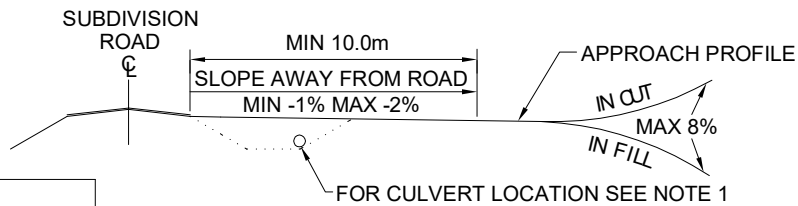


DITCH AND CULVERT LOCATION

RESIDENTIAL
MIN WIDTH 6.0m
MAX WIDTH 8.0m

FIELD APPROACH
MIN WIDTH 6.0m
MAX WIDTH 10.0m

INDUSTRIAL
MIN WIDTH 8.0m
MAX WIDTH 12.0m

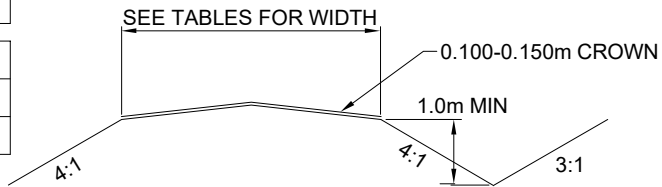

APPROACH CROSS SECTION

NOTES

- WHEN CULVERTS ARE REQUIRED THEY MUST BE C.S.P. CULVERTS AND MEET THE FOLLOWING MINIMUM DIAMETERS OR SIZED TO ACCOMMODATE DITCH FLOWS  
 RESIDENTIAL - 0.400m  
 INDUSTRIAL - 0.500m  
 - LENGTH WILL VARY WITH DEPTH OF FILL  
 - CULVERT TO BE PLACED AT TOE OF BACKSLOPE
- ALL DIMENSIONS SHOWN ARE IN METERS
- MINIMUM APPROACH LENGTH - FROM EDGE OF ROAD SHOULDER TO R/W BOUNDARY



RESIDENTIAL AND INDUSTRIAL APPROACHES

02	OCT 23	THIRD EDITION
01	DEC 13	SECOND EDITION
NO.	DATE	REVISION

DATE DRAWN: SEP 2008
APPROVED BY: J. HANCOCK P.ENG.
DRAWING NUMBER 7.12